


GF-6 CRANE SYSTEM

Features

- 10 modes (platform and remote)
- Ground or track use
- Platform and remote
- Crane base as western or track dolly
- Fast and easy set-up
- Lightweight parts
- Interchangeable extensions: extensions in 40 / 75 / 90 / 150 cm
- Extremely stable arm
- Optimum mixture of stainless steel and aluminium alloy components
- Surface hardened finish (Hart-Coat ®)

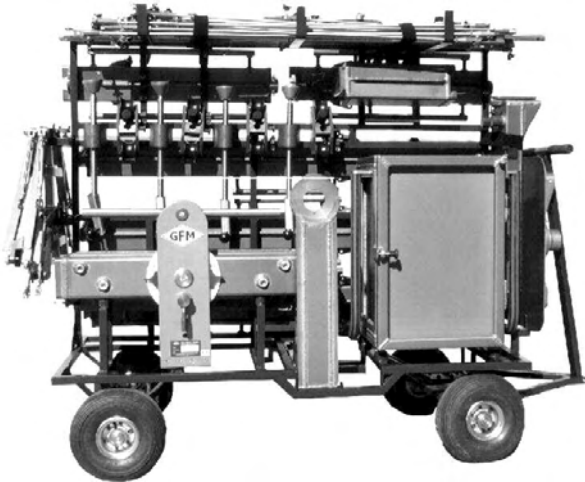

GF-6 crane transporter

Base Dolly - Dolly height

Dimensions	94cm x 128cm
Dolly weight	59kg 129 lbs
Top of pivot section	176cm 4' 5"
Top of pivot section (w. rigging harness)	209cm 10' 3"

VERSION 1 (2 man ride)


Max. Height	320cm	10' 8"
Lift capacity	250kg	550 lbs
Lift range	332cm	11'
Crane weight	139kg	305 lbs
Counterweight required	432kg	950 lbs

Extension arms required

to front	1x150cm	5'
to rear	1x75cm	2' 6"

Reach (measured from pivot to)

front	256cm	8' 6"
rear	172cm	5' 9"

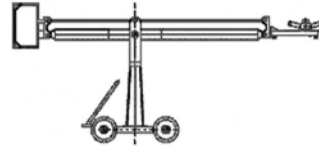

VERSION 2 (1 man ride)

Max. Height	390cm	13'
Lift capacity	140kg	308 lbs
Lift range	472cm	15' 8"
Crane weight	149kg	327 lbs
Counterweight required	368kg	809 lbs

Extension arms required

to front	1x150cm/5' + 1x75cm/2' 6"
to rear	1x75cm 2' 6"

Reach (measured from pivot to)

front	331cm	11'
rear	172cm	5' 9"

